



# wirefield PROLED 100 HSS

**100,000 hrs**  
**L80/B50**

**SUSPENDED  
LINEAR**



## Technical Specification

- Steel body with double parabolic aluminium louvred LED modules.
- Available with connection accessory for continuous run.
- IP40.
- IK05.
- Integral emergency available.
- UGR <19.
- RAL colour options.


## Features

Wattage	20w to 39w
Lumens per Watt	Up to 133
CRI	80+
L**B**	100,000 hours L80 B50
Driver	Fixed Output / Dali / Switch Dim
Controls	Microwave Sensor / Bluetooth / Integral Daylight Sensor / CF / Smart Sensor
Colour Temperature	4000k
Temperature Rating	0°C to +35°C (excluding emergency)

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*

## Product Specification

Code	Watts	Total Delivered lumens	L x W x D (mm)	Weight (kg)
HSS1204KA	20	2541	1215 x 175 x 40	3.7
HSS1294KB	29	3811	1555 x 175 x 40	5.8
HSS1394KB	39	4878	1555 x 175 x 40	5.8

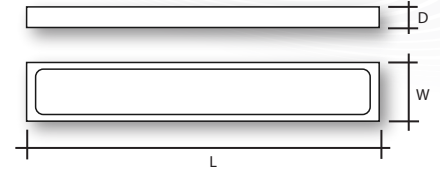

## Control Options

### Driver Options:

Fixed Output

DALI

Switch Dim

### Sensor Options:

Microwave Sensor

Bluetooth Control

Integral Daylight Sensor

Corridor Function

Smart Sensor

## LED Options

### Additional Options:

CCT 3000K

## Emergency Options

### Emergency Options:

3hr Integral Maintained

3hr Integral Maintained Self Test

3hr Integral Maintained with DALI Interface

Integral Emergency with 'Escape Route' Optic

Integral Emergency with 'Open Area' Optic

## Accessories

### Optional Accessories:

RAL Colour Options

Joint Pieces for Continuous Run

Full photometry and LDT files available on request

Designed & manufactured to comply with EN 60598 and are CE certified

*LIGHTING INNOVATION FOR COMMERCIAL APPLICATIONS*